



Quality Tools, Equipment & Line Materials for the Energy Industry.





NAGAKI

Wire / Conductor Grip with Locking Nut - 2TON

Trust only the Original NGK - Established in 1946

Part No. AL-2TON-GRIP-L

"L" Suffix =
Locking nut option

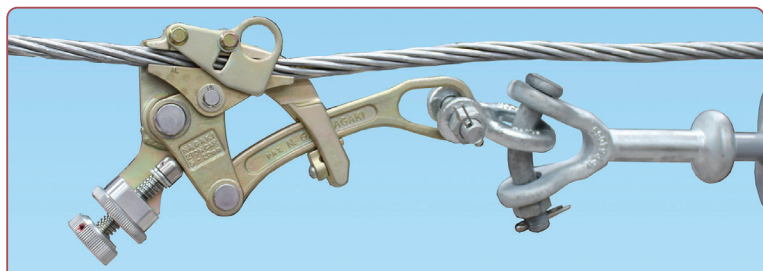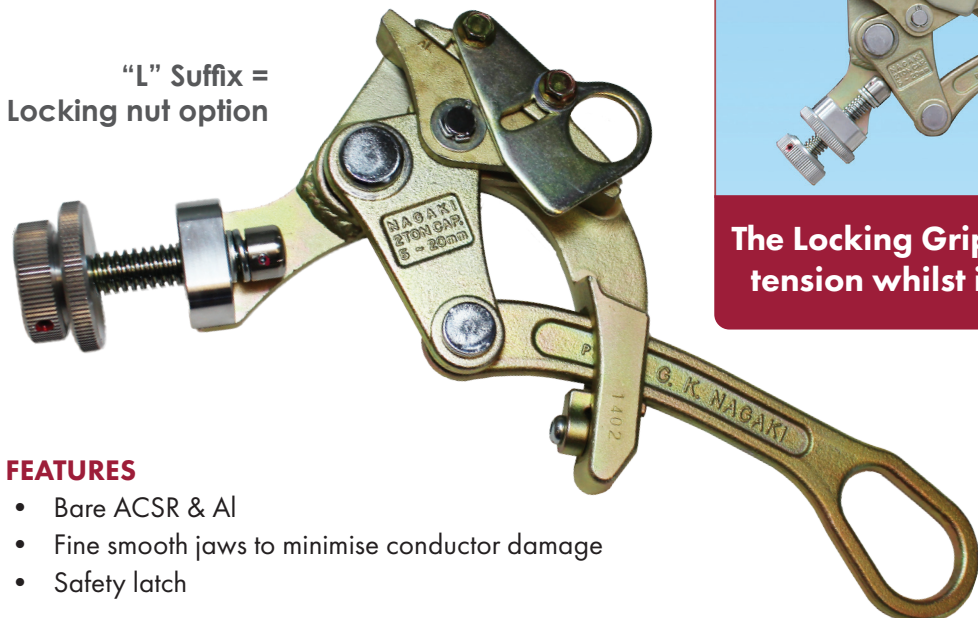

The Locking Grip is ideal for holding conductor tension whilst installing Temporary switches

**5-20mm
ACSR
& Al**

FEATURES

- Bare ACSR & Al
- Fine smooth jaws to minimise conductor damage
- Safety latch

SPECIFICATIONS

Conductor/Wire OD (mm)		Conductor	WLL (kN)	Jaw Length (mm)	Eye Width (mm)	Wt (kg)
Min.	Max.					
5	20	ACSR & AL	20	100	32	1.7

NGK Grips

- Made in Japan from Quality Japanese materials
- Manufactured from high tensile alloy steel, hot forged, heat-treated, precision machined and zinc-plated
- Safety latch on all models
- Special shaped pulling eyes suit all brands of strap hoists/pullers

NAGAKI
**GRIPPING
THE GLOBE**



IMPORTANT

The "SAFETY" of your personnel and the longevity of your equipment depends on the Correct use, Inspection, Cleaning and Maintenance.

Correct use

- Operators should be trained in the relevant job at hand
- Read and understand the Instruction/Operators Manual
- Ensure you have selected the correct grip for the conductor type, size and tension, as well as the ancillary equipment. (e.g. max tension of hoist).



For more information on the care and maintenance of your Grips
CLICK or SCAN the QR-Code

Contact TEN for cleaning equipment